



Step 1

Open draadloze netwerkverbindingen (Tablet,smartphone,pc of laptop) en u klikt op draadloze netwerken. Selecteer het draadloze netwerk van de datalogger(Het AP-nummer van uw omvormer(Deze is terug te vinden aan de zijkant of onderkant van de omvormer of uw opleverdocument),er zijn voor deze verbinding geen wachtwoorden nodig. De naam van het netwerk bestaat uit het AP-nummer. (Deze lijkt op het nummer in onderstaande afbeelding).Klik vervolgens op Verbinden. (Afbeelding 1.). Als uw apparaat verbonden is met het AP-nummer staat er verbonden of connected. (Afbeelding 2.)

Afbeelding 1.

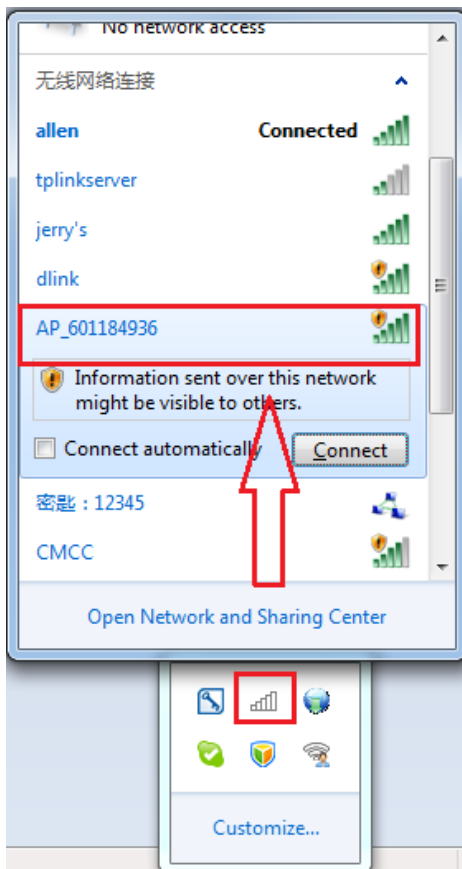


Afbeelding 2.

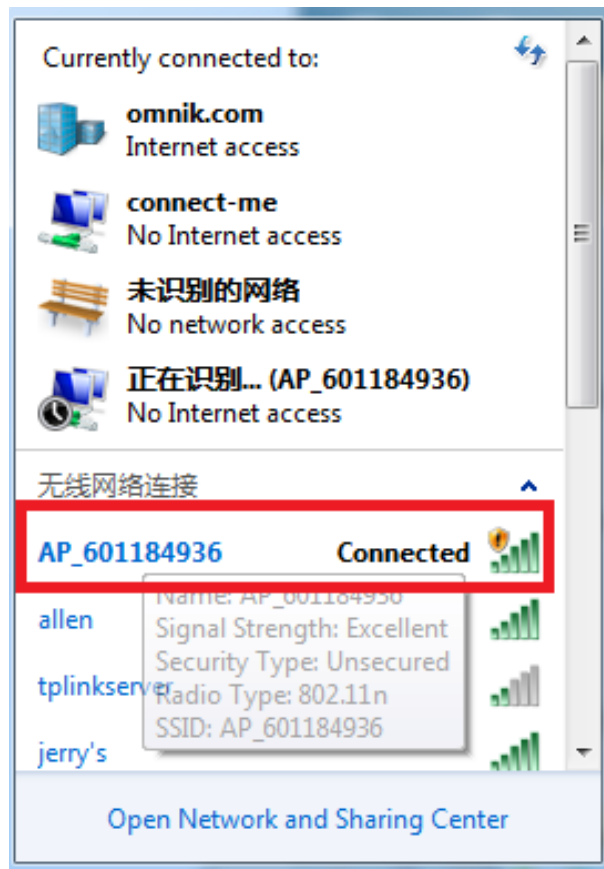

Stap 2.

Voer in de adresbalk van uw internet-browser (de balk waar u normaliter een website ingeeft) het adres 10.10.100.254 in. Vervolgens kan er om een wachtwoord en gebruikersnaam gevraagd worden. Dit is beide "admin".


Een internetbrowser kan zijn: Google Chrome, Safari, Internet Exploren, Mozilla Firefox.

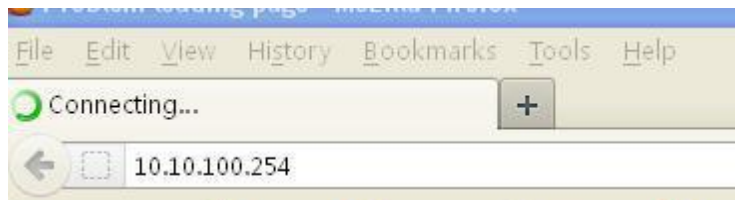

Step 3


Nu komt u bij een Wizard uit die we door gaan nemen om de verbinding te herstellen.

U krijgt dit scherm te zien en u klikt op “Wizard in de linkse kolom”(Rood gearceerd).

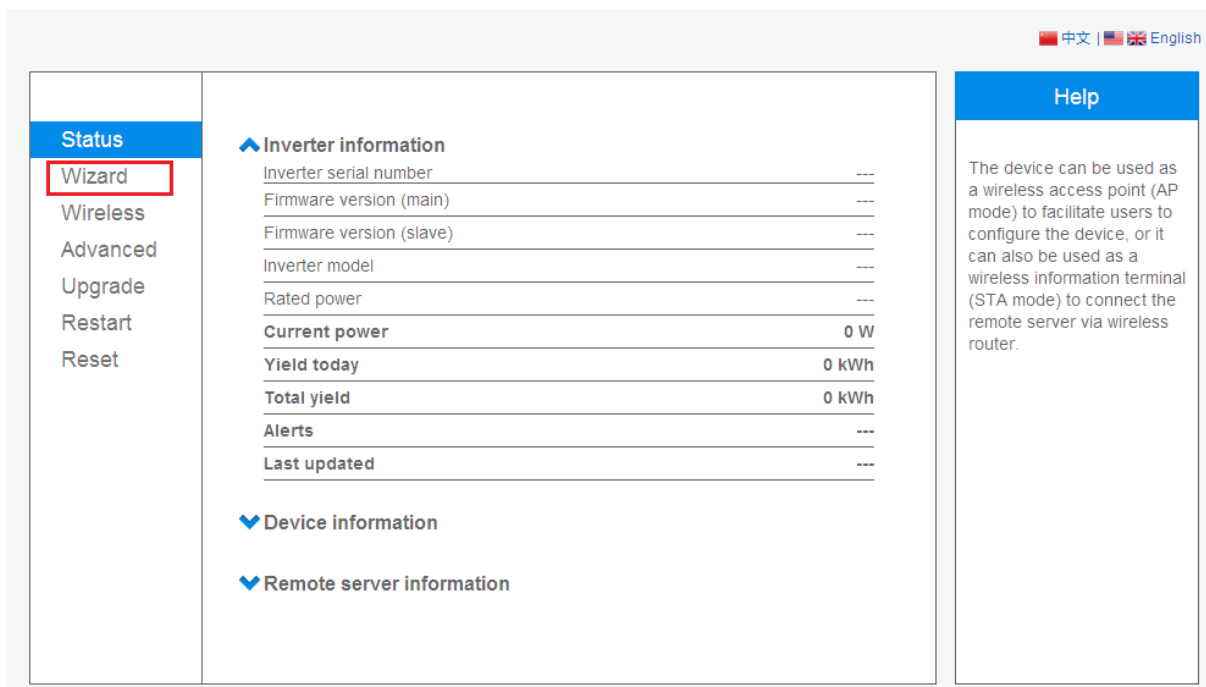

The screenshot shows a web interface with a sidebar on the left containing menu items: Status, Wizard (highlighted with a red box), Wireless, Advanced, Upgrade, Restart, and Reset. The main content area is divided into sections: 'Inverter information' with fields for serial number, firmware versions, model, power, and yield; 'Device information'; and 'Remote server information'. A 'Help' sidebar on the right explains the device's wireless capabilities. Language options for Chinese and English are visible in the top right.

Vervolgens klikt u op “start”.

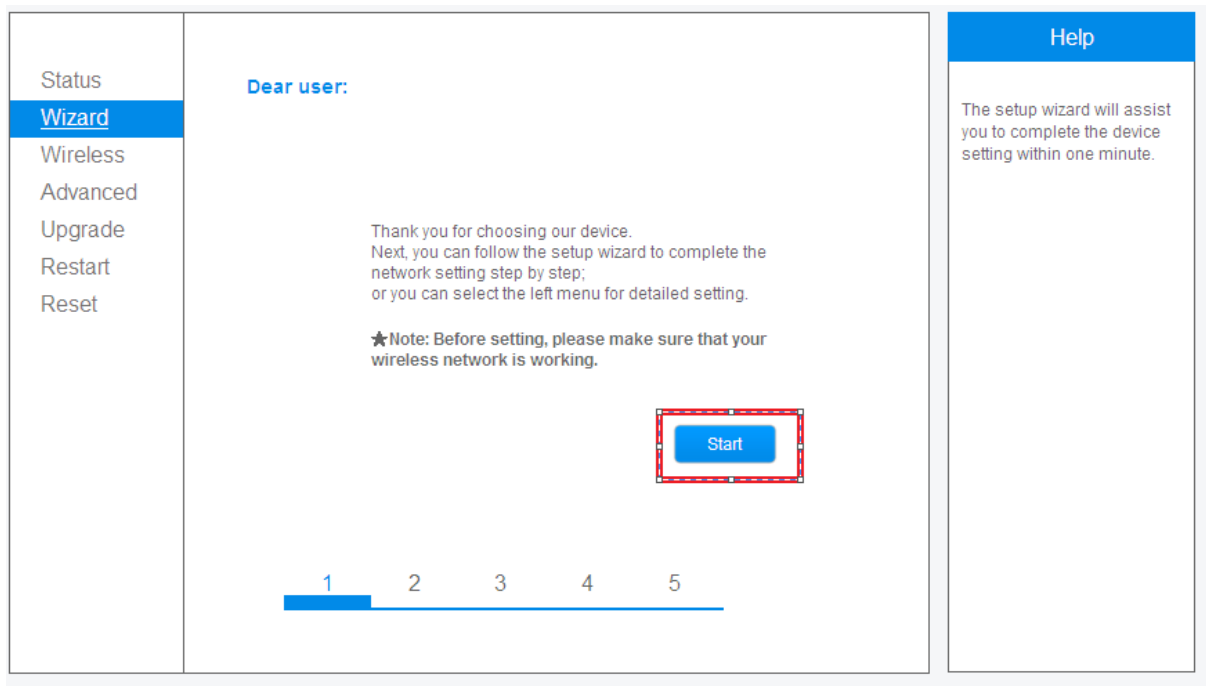

The screenshot shows the 'Dear user' screen of the setup wizard. The sidebar on the left has 'Wizard' selected. The main content area contains a welcome message, instructions to follow the wizard or use the sidebar for detailed settings, and a note to ensure the wireless network is working. A blue 'Start' button is highlighted with a red dashed box. At the bottom, a progress indicator shows five steps, with the first step (1) highlighted in blue.

De Omvormer gaat nu alle wifi-netwerken zoeken die binnen bereik zijn.

中文 | English

Status
Wizard
Wireless
Advanced
Upgrade
Restart
Reset

Please select your current wireless network:

<input type="radio"/>	AP_602471173	ac:cf:23:00:fb:f0	24%	6
<input type="radio"/>	ChinaNet-SFVe	0c:4c:39:10:65:c9	50%	6
<input type="radio"/>	ITV-SFVe	5a:4c:39:10:65:ca	50%	6
<input type="radio"/>	AP_501201091	ac:cf:23:10:84:04	29%	10
<input checked="" type="radio"/>	yingzhendlink	ec:6c:9f:04:b3:2c	65%	10
<input type="radio"/>	AP_901000414	ac:cf:23:ff:33:2c	100%	10
<input type="radio"/>	AP_300000005	ac:cf:23:10:f3:bc	60%	10
<input type="radio"/>	Volans_jinling	ec:6c:9f:07:7a:e6	5%	10
<input type="radio"/>	AP_300000003	ac:cf:23:10:f3:e4	44%	10
<input type="radio"/>	AP_601000000	ac:cf:23:10:f3:48	34%	10

★ Note: When RSSI of the selected WiFi network is lower than 15%, the connection may be unstable, please select other available network or shorten the distance between the device and router.

Refresh

Add wireless network manually:

Network name (SSID)
(Note: case sensitive)

Encryption method

Encryption algorithm

Back Next

1 2 3 4 5

U selecteert in de lijst uw Wifi-netwerk(draadloos netwerk), Check of de signaalsterkte(dit is het percentage wat in de lijst achter uw draadloos netwerk staat) boven de 15% zit. Dit is essentieel voor een goede en stabiele verbinding. klikt op Next.

Als u dit hebt doorlopen wordt er om het wachtwoord van uw draadloos netwerk gevraagd.

Om typ-fouten te voorkomen vinkt u "Show Password" aan.

Vervolgens geeft u in het bovenste en onderste venster het wachtwoord in van het draadloze netwerk en drukt op next.

Status

Wizard

Wireless

Advanced

Upgrade

Restart

Reset

Please enter the wireless network password:

Password (8-64 bytes)
(Note: case sensitive)

Re-enter password

Show Password

Connecting ..

Back Next

1 2 3 4 5

Help

Please make sure you have entered the correct password.

Het volgende venster wat u ziet is:

Status

Wizard

Wireless

Advanced

Upgrade

Restart

Reset

Please fill in the following information:

Obtain an IP address automatically

IP address 0.0.0.0

Subnet mask 0.0.0.0

Gateway address 0.0.0.0

DNS server address

Back Next

1 2 3 4 5

Help

Most systems support the function of DHCP to obtain IP address automatically. Please select disable and add it manually if your router does not support such function.

Zorg dat het bovenste balkje op "Enable" staat en klik op next.

Als u het goede wachtwoord en netwerk heeft ingegeven krijgt u dit te zien:

The screenshot shows a configuration wizard interface with three main sections:

- Left sidebar:** A vertical menu with options: Status, Wizard (highlighted in blue), Wireless, Advanced, Upgrade, Restart, and Reset.
- Center panel:** Displays the message "Setting complete!" in blue. Below it, instructions state: "Click OK, the settings will take effect and the system will restart immediately." and "If you leave this interface without clicking OK, the settings will be ineffective." At the bottom, there are two buttons: "Back" and "OK" (highlighted with a red box). A progress bar at the very bottom shows six steps, with step 6 being the active and highlighted step.
- Right sidebar:** A "Help" section with the text: "After clicking OK, the system will restart immediately."

Klik op next en het volgende venster verschijnt na enkele seconden:

The screenshot shows the next step in the configuration wizard:

- Left sidebar:** Identical to the previous screenshot, with "Wizard" highlighted.
- Center panel:** Displays the message "Setting complete! Please close this page manually!" in bold. Below it, instructions state: "Please login our management portal to monitor and manage your PV system. (Please register an account if you do not have one.)" and "To re-login the configuration interface, please make sure that your computer or smart phone and our device are in the same network segment, and enter the new IP address of the device to access the interface."
- Right sidebar:** A "Help" section with a note: "★ Note: The IP address of the device may have changed, please refer to User Manual to check the procedures to obtain the new IP address."

Als u dit heeft gezien kunt u de Internet-browser **afsluiten**.

Step 4

Ga terug naar draadloze netwerkverbindingen (Tablet, smartphone, pc of laptop) en u klikt op draadloze netwerken. Verbreek nu de verbinding met het AP-nummer en maak verbinding met uw draadloze netwerk.

Afbeelding 1.

